


Aluminium ANODE ZDB55-2

gross weight: 4,80 kg
nett weight: 3,80 kg

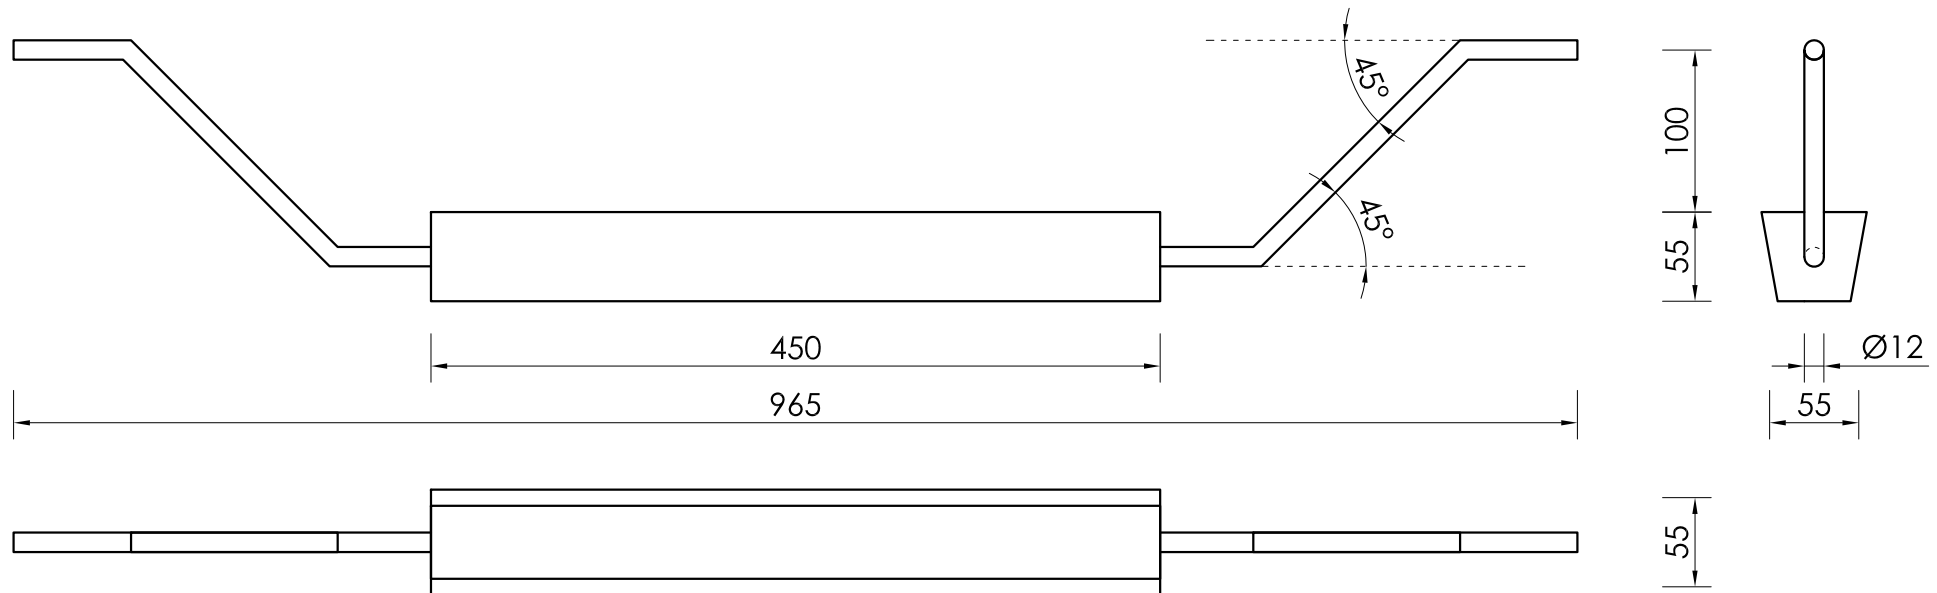

Technical specification AlZnIn - alloy type A2 according to EN12496:2013 :

| | | | |
|--------------------|---------------|-------------|-----------|
| Alloying elements: | | Impurities: | |
| Zn [%]: | 3,0 - 5,5 | Fe [%]: | max 0,09 |
| In [%]: | 0,016 - 0,040 | Cu [%]: | max 0,005 |
| Al - | balance | Si [%]: | max 0,10 |

Electrochemical efficiency min: 2500 Ah/kg
according to DNV RP B401 test appendix B

Note:

- All weights and dimensions are nominal.
- Dimensions in mm

| | | | |
|--|---|-------------------|------------------|
|  MAKROMOR CATHODIC PROTECTION | MAKROMOR SP. Z O.O. Ul. Gołębia 15 81-185 Gdynia, POLAND Phone: +48 58 661-57-99 Fax: +48 58 661-01-89 e-mail: biuro@makromor.pl website: www.makromor.pl | Scale: | 1:5 |
| | | Insert type: | S235JR |
| | | Alloy: | AlZnIn |
| Type: | ALUMINIUM TANK ANODE ZDB55-2 | Alternative type: | |
| Product code: | A48/ZDB55/55/55/450/965/0 | Drawing No.: | AZDB552/0 |
| Drawer: | Ewa Nawrocka | Date: | 17-04-2013 |
| Approved: | Grzegorz Pryłowski | Date: | 18-04-2013 |
| Copyright MAKROMOR SP. Z O.O. All rights reserved. | | | |