


# Aluminium ANODE K3-4A

gross weight: 4,80 kg  
nett weight: 4,00 kg

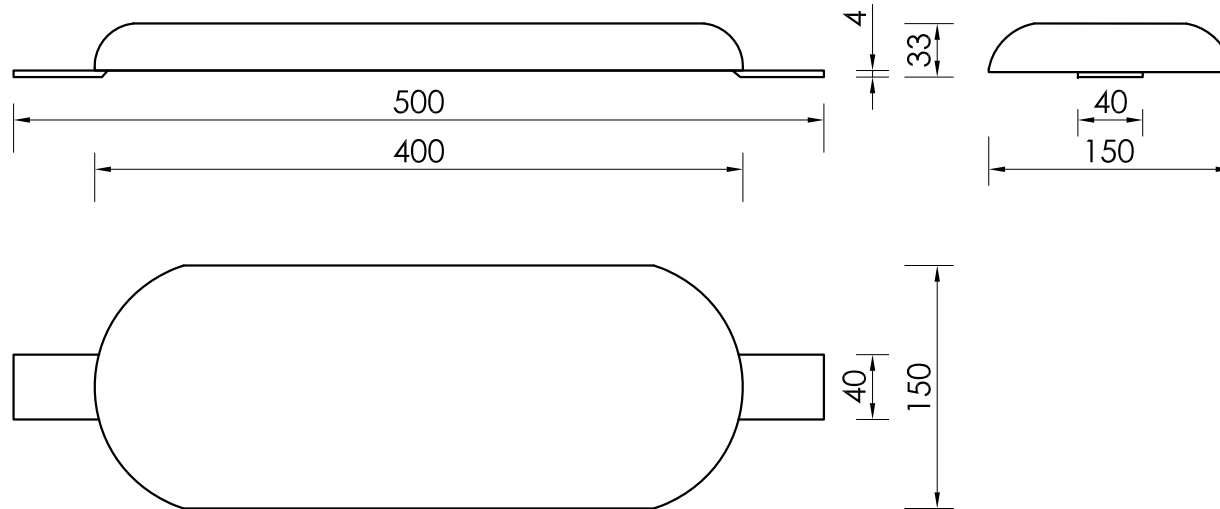

Technical specification AlZnIn - alloy type A2 according to EN12496:2013 :

Alloying elements:		Impurities:	
Zn [%]:	3,0 - 5,5	Fe [%]:	max 0,09
In [%]:	0,016 - 0,040	Cu [%]:	max 0,005
Al -	balance	Si [%]:	max 0,10

Electrochemical efficiency min: 2500 Ah/kg  
according to DNV RP B401 test appendix B

Note:

- All weights and dimensions are nominal.
- Dimensions in mm

 <b>MAKROMOR</b> CATHODIC PROTECTION	MAKROMOR SP. Z O.O. Ul. Gołębia 15 81-185 Gdynia, POLAND Phone: +48 58 661-57-99 Fax: +48 58 661-01-89 e-mail: biuro@makromor.pl website: www.makromor.pl		Scale:	<b>1:5</b>
	Type: <b>ALUMINIUM HULL ANODE 3-4A</b>		Insert type:	<b>S235JR</b>
Product code: <b>A48/K3/150/33/400/500/0</b>		Alloy:	<b>AlZnIn</b>	
Drawer: Ewa Nawrocka		Date: 15-04-2013	Approved: Grzegorz Prytowski	Alternative type:
Date: 15-04-2013		Drawing No.:		<b>AK34A/0</b>
Date: 16-04-2013		Copyright MAKROMOR SP. Z O.O. All rights reserved.		