
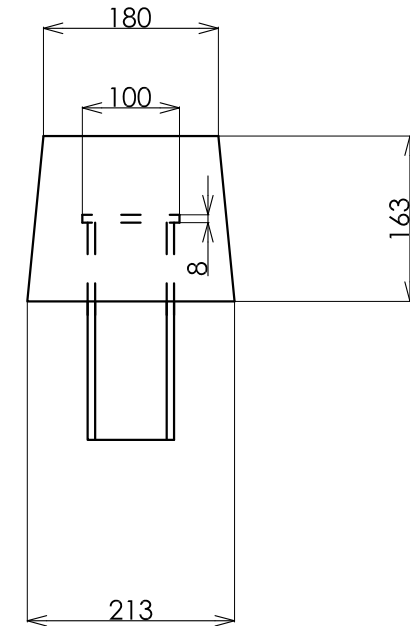


Aluminium anode A-10100

gross weight: 101,00 kg
net weight: 92,30 kg

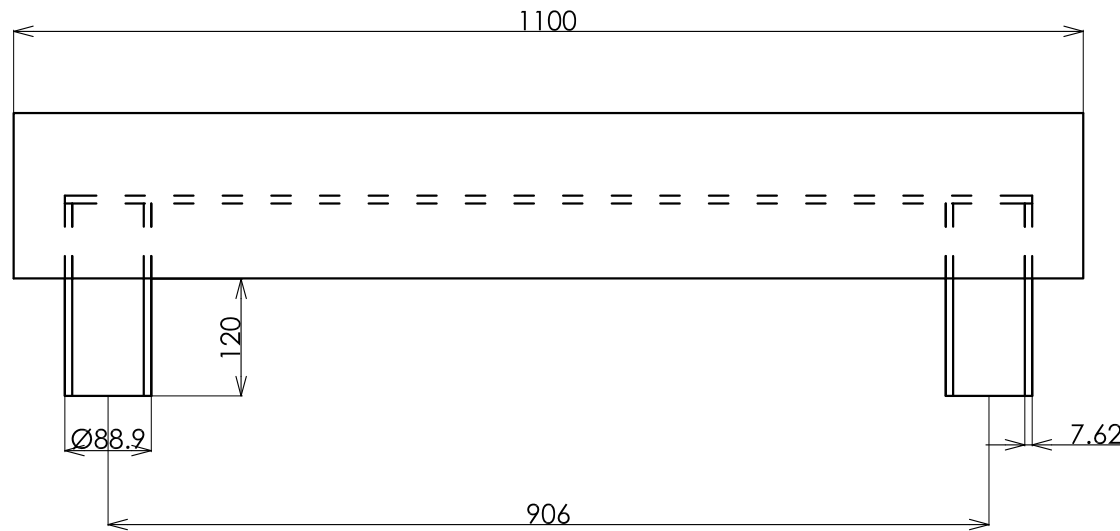

Technical specification AlZnIn:

Alloying elements:

Zn [%]: 2,5 - 5,75

In [%]: 0,015 - 0,040

Al - balance

Impurities:

Fe [%]: 0,09 max

Si [%]: 0,12 max

Cu [%]: 0,003 max

Cd [%]: 0,002 max

The alloy chemical composition shall be tested using a Q4 Tasman spectrometer, serial number OES3829

Electrochemical efficiency min: 2500 Ah/kg
acc. DNV RP B401 test A

Note:

- All weights and dimensions are nominal.
- Dimensions in mm
- Spacing between anode bottom and protected structure (120mm on drawing above) subject to further agreement

 MAKROMOR CATHODIC PROTECTION	MAKROMOR SP. Z O.O. Ul. Golebia 15 81-185 Gdynia, POLAND Phone: +48 58 661-57-99 Fax: +48 58 661-01-89 e-mail: biuro@makromor.pl website: www.makromor.pl	Scale:	1:5
		Insert material: S355JR flat bar, ASTM A106 Grade "B" pipe	Alloy:
Type:	ALUMINIUM ANODE A-10100	Alternative type:	
Product code:	A10100/A-10100/218/163/1010/995/0	Drawing No.:	A-10100/1
Drawer:	Łukasz Stabek	Date:	05-06-2014
Checked:	Grzegorz Pryłowski	Date:	
Copyright MAKROMOR SP. Z O.O. All rights reserved.			