


Aluminium ANODE K2-3

gross weight: 4,80 kg

nett weight: 4,30 kg

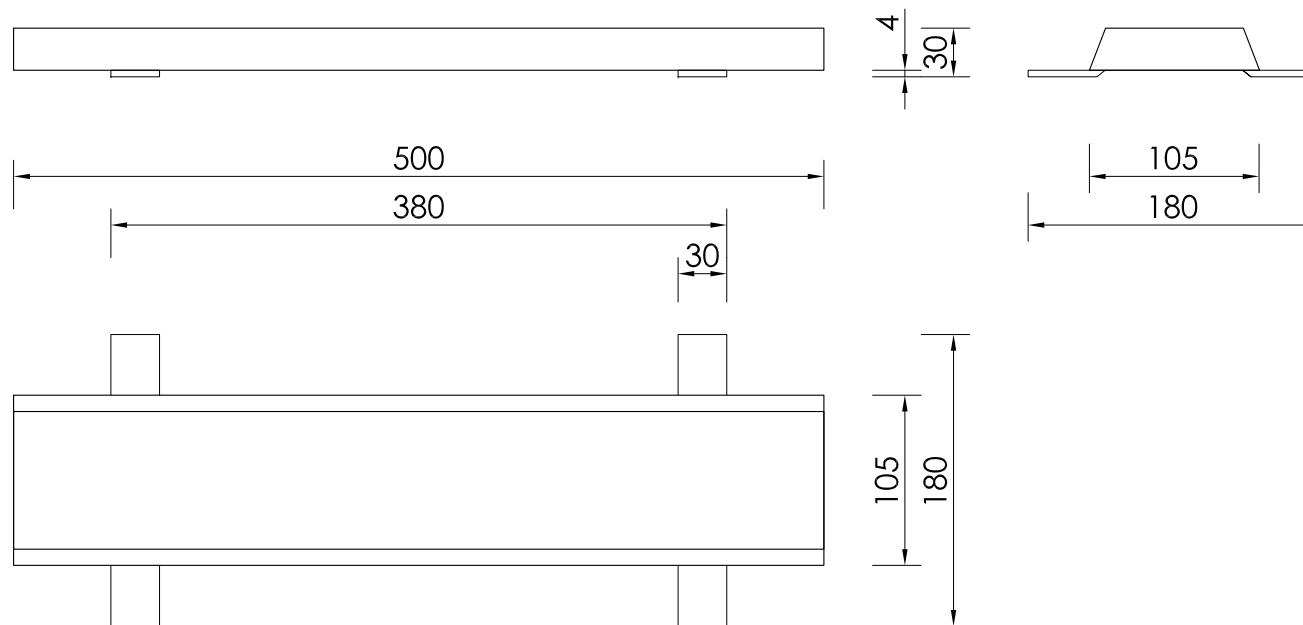

Technical specification AlZnIn - alloy type A2 according to EN12496:2013 :

Alloying elements:

Zn [%]: 3,0 - 5,5

In [%]: 0,016 - 0,040

Al - balance

Impurities:

Fe [%]: max 0,09

Cu [%]: max 0,005

Si [%]: max 0,10

Electrochemical efficiency min: 2500 Ah/kg
according to DNV RP B401 test appendix B

Note:

- All weights and dimensions are nominal.
- Dimensions in mm

 MAKROMOR CATHODIC PROTECTION	MAKROMOR SP. Z O.O. Ul. Gołębia 15 81-185 Gdynia, POLAND Phone: +48 58 661-57-99 Fax: +48 58 661-01-89 e-mail: biuro@makromor.pl website: www.makromor.pl	Scale:	1:5
		Insert type:	S235JR
		Alloy:	AlZnIn
Type:	ALUMINIUM HULL ANODE K2-3	Alternative type:	
Product code:	A48/K2/105/30/500/380/0	Drawing No.:	AK23/0
Drawer:	Ewa Nawrocka	Date:	15-04-2013
Approved:	Grzegorz Pryłowski	Date:	16-04-2013
Copyright MAKROMOR SP. Z O.O. All rights reserved.			