


# Aluminium ANODE K-A80

gross weight: 8,00 kg  
nett weight: 7,10 kg

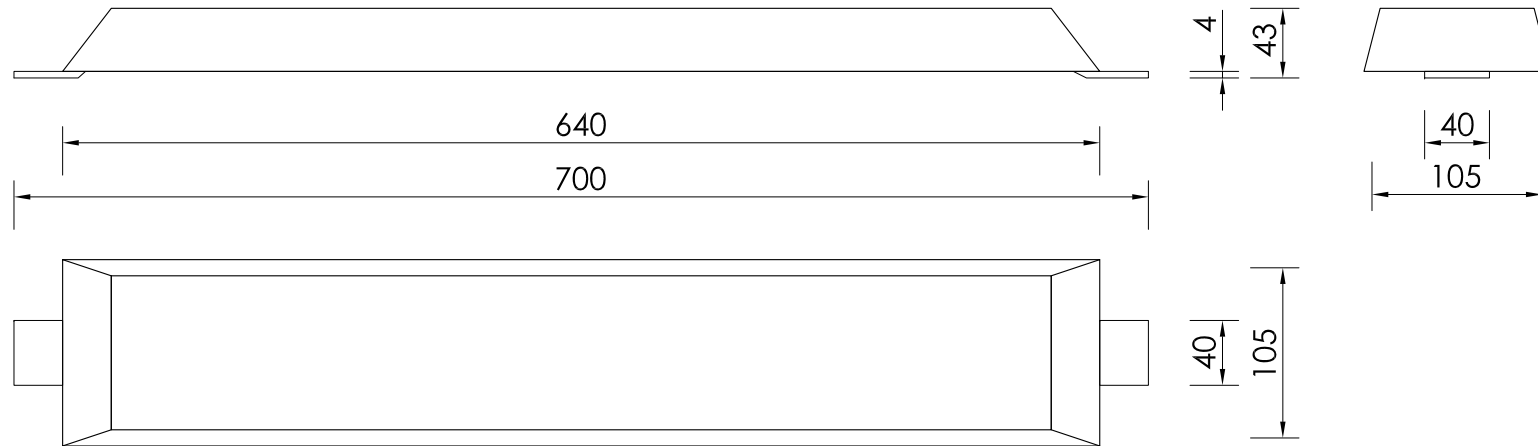

Technical specification AlZnIn - alloy type A2 according to EN12496:2013 :

Alloying elements:	Impurities:
Zn [%]: 3,0 - 5,5	Fe [%]: max 0,09
In [%]: 0,016 - 0,040	Cu [%]: max 0,005
Al - balance	Si [%]: max 0,10

Electrochemical efficiency min: 2500 Ah/kg  
according to DNV RP B401 test appendix B

Note:

- All weights and dimensions are nominal.
- Dimensions in mm

 <b>MAKROMOR</b> CATHODIC PROTECTION	MAKROMOR SP. Z O.O. Ul. Gołębia 15 81-185 Gdynia, POLAND Phone: +48 58 661-57-99 Fax: +48 58 661-01-89 e-mail: biuro@makromor.pl website: www.makromor.pl	Scale:	<b>1:5</b>
		Insert type:	<b>S235JR</b>
		Alloy:	<b>AlZnIn</b>
Type:		Alternative type:	
<b>ALUMINIUM HULL ANODE K-A80</b>			
Product code:		Drawing No.:	
<b>A80/K/105/43/640/700/0</b>		<b>AKA80/0</b>	
Drawer:	Date:	Approved:	Date:
Ewa Nawrocka	15-04-2013	Grzegorz Pryłowski	16-04-2013
Copyright MAKROMOR SP. Z O.O. All rights reserved.			