


Zinc ANODE K2-3

gross weight: 11,00 kg

nett weight: 10,50 kg

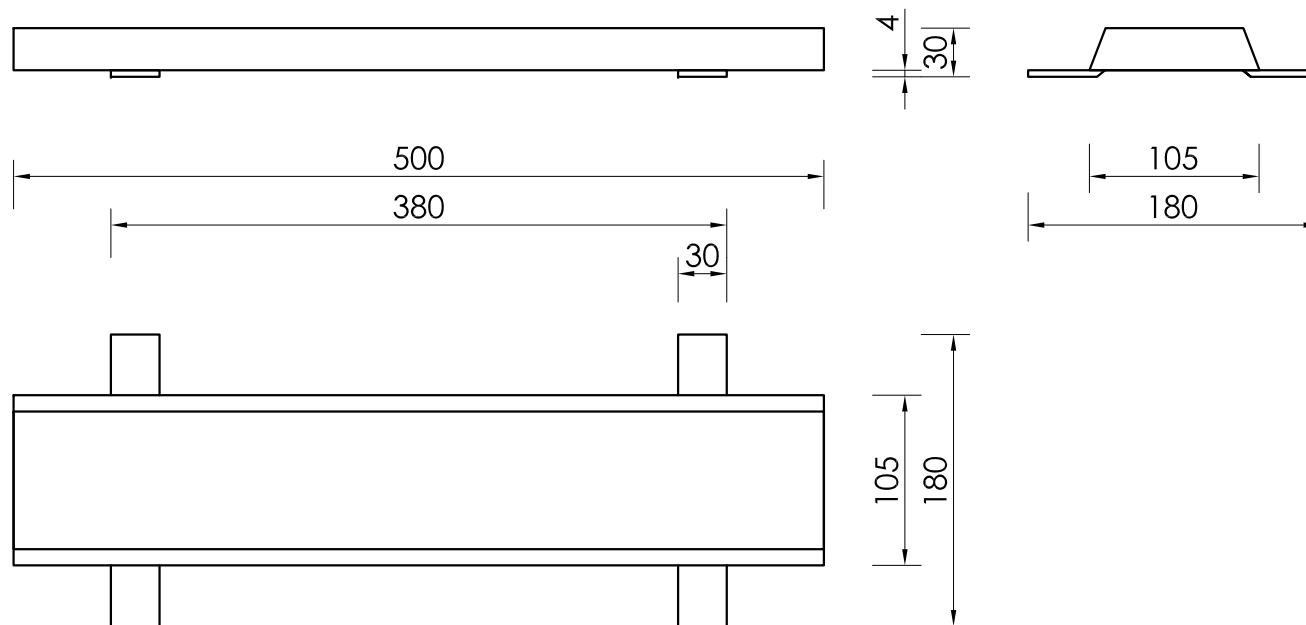

Technical specification ZnAlCd - alloy type Z1 according to EN12496:2013 :

Alloying elements:

Al [%]: 0,10 - 0,50
Cd [%]: 0,025 - 0,07
Zn [%]: remainder

Impurities:

Fe [%]: max 0,005
Cu [%]: max 0,005
Pb [%]: max 0,006

Electrochemical efficiency min: 780 Ah/kg
acc. DNV RP B401 test appendix B

Note:

- All weights and dimensions are nominal.
- Dimensions in mm

 MAKROMOR CATHODIC PROTECTION	MAKROMOR SP. Z O.O. Ul. Gołębia 15 81-185 Gdynia, POLAND Phone: +48 58 661-57-99 Fax: +48 58 661-01-89 e-mail: biuro@makromor.pl website: www.makromor.pl	Scale:	1:5
		Insert type:	S235JR
		Alloy:	ZnAlCd
Type:	ZINC HULL ANODE K2-3	Alternative type:	
Product code:	Z110/K2/105/30/500/380/0	Drawing No.:	ZK23/0
Drawer:	Ewa Nawrocka	Date:	15-04-2013
Approved:	Grzegorz Prytowski	Date:	16-04-2013
Copyright MAKROMOR SP. Z O.O. All rights reserved.			